


BRX SAFETY SYSTEM

INTERNATIONAL PATENT



CODICE	DESCRIZIONE	LG. MM	ESTREMITA'	EST. TUBO	C.R. MIN. R160
TI25AS1332.5/300/2A	TIRANTE DOPPIA FUNE INOX 133 DIA 2,5 - ASOLA dinamica +ASOLA+ASOLA	300	2 ASOLE	DIA. 14 -25	KG 600
TI35AS1333/350/2A	TIRANTE DOPPIA FUNE INOX 133 DIA 3 - ASOLA dinamica + ASOLA + ASOLA	350	2 ASOLE	DIA. 26-35	KG 900
TI45AS1333/350/2A	TIRANTE DOPPIA FUNE INOX 133 DIA 3 - ASOLA dinamica + ASOLA + ASOLA	350	2 ASOLE	DIA. 36-45	KG 900
TI65AS1333/400/2A	TIRANTE DOPPIA FUNE INOX 133 DIA 3 - ASOLA dinamica +ASOLA+ASOLA	400	2 ASOLE	DIA. 46-65	KG 900
TI95AS1333/450/2A	TIRANTE DOPPIA FUNE INOX 133 DIA 3 - ASOLA dinamica + ASOLA + ASOLA	450	2 ASOLE	DIA. 66-95	KG 900
TI70AS1334/400/2A	TIRANTE DOPPIA FUNE INOX 133 DIA 4 - ASOLA dinamica + ASOLA + ASOLA	400	2 ASOLE	DIA. 50-70	KG 1500
TI100AS1334/450/2A	TIRANTE DOPPIA FUNE INOX 133 DIA 4 - ASOLA dinamica + ASOLA + ASOLA	450	2 ASOLE	DIA. 71-100	KG 1500
NOTA	FUNE INOX AISI 316 - TENDITORE OT58 CROMATO - MAICOTTI RAME				
	ALTERNATIVA CON MANICOTTI INOX A RICHIESTA				
	N.B. DA COLLEGARE A FLANGIA INOX 430 - RONDELLE OT 58 CROMATE				

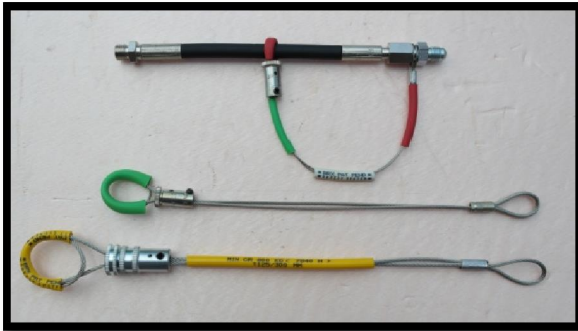